ENDLESS WEB SLING

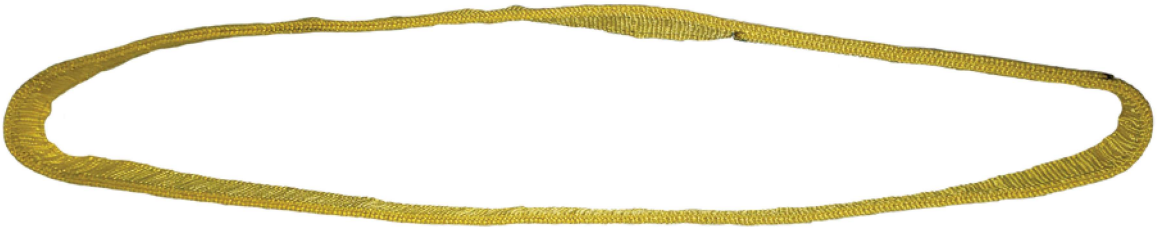

Features & Benefits:

- One of the most versatile web slings available
- Can be used in a Vertical, Choker or Basket Hitch
- Easily rotated to adjust bearing points and account for wear
- Available in widths ranging from 1" to 12"
- Available in 1-Ply thru 4-Ply
- Additional wear protection is recommended
- Polyester provided as a standard, Nylon available upon request

Sling Thickness	Tolerance
1 PLY	+/- 1.5" + 1.5% of Sling Length
2 PLY	+/- 2" + 2% of Sling Length
3 & 4 PLY	+/- 3" + 3% of Sling Length

* For web sling widths wider than 6", add 1/2" to these values. For tighter tolerance or matched set lengths,consult the manufacturer.

Matched Set Length Tolerance – When multiple legs of a bridle sling are made, or when multiple slings are prescribed to be made within a Matched Set Tolerance, their length variance from their nominal length shall remain within a dimension equal to one-half of their corresponding Standard Length Tolerance Values listed.

Measurement Method – Web sling length is measured with the sling laid flat while being manually pulled taut.

		RATED CAPCITY IN POUNDS			
	Type 5 EN	Vertical	Choker	Basket Hitch @ 90°	Web Width
ONE PLY	1901	3,200	2,560	6,400	1"
	1902	6,200	4,960	12,400	2"
	1903	9,400	7,520	18,800	3"
	1904	12,400	9,920	24,800	4"
	1906	18,600	14,880	37,200	6"
	1908	21,200	16,960	42,400	8"
	1910	26,500	21,200	53,000	10"
	1912	31,800	25,440	63,600	12"
TWO PLY	2901	6,200	4,960	12,400	1"
	2902	12,400	9,920	24,800	2"
	2903	17,600	14,080	35,200	3"
	2904	22,000	17,600	44,000	4"
	2906	33,000	26,400	66,000	6"
	2908	42,300	33,840	84,600	8"
	2910	52,900	42,320	105,800	10"
	2912	63,500	50,800	127,000	12"
THREE PLY	3901	9,600	7,680	19,200	1"
	3902	17,700	14,160	35,400	2"
	3903	25,600	20,480	51,200	3"
	3904	34,600	27,680	69,200	4"
	3906	48,900	39,120	97,800	6"
	3908	61,400	49,120	122,800	8"
	3910	72,000	57,600	144,000	10"
	3912	80,600	64,480	161,200	12"
FOUR PLY	4901	11,000	8,800	22,000	1"
	4902	22,000	17,600	44,000	2"
	4903	32,900	26,320	65,800	3"
	4904	40,800	32,640	81,600	4"
	4906	61,200	48,960	122,400	6"
	4908	81,900	65,520	163,800	8"
	4910	96,000	76,800	192,000	10"
	4912	107,000	85,600	214,000	12"

Consider using Roundslings in applications requiring 3-Ply or 4-Ply slings, wider than 6"

WARNING: Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should never be used at angles less than 30 degrees.